

Click here



Preferences

type filter text

- Ant
- Data Management
- General
- Help
- Install/Update
- Java
- KNIME**
- Plug-in Development
- Report Design
- Run/Debug
- Team

### Ant

General Ant Settings:  
File names used to emulate "-find". Used by "Run As > Ant Build" when the current selection is not a buildfile. List is comma separated (e.g. export.xml, build.xml, clean.xml).

Names:

Separate JRE timeout (ms):

Documentation URL:

Always run new Ant configurations in the same JRE as the workspace

Some tasks, such as "javac", require the tools.jar library to be on the Ant runtime classpath to execute successfully.

Warn when tools.jar is not on classpath

Show error dialog when Ant build fails


Create problem markers from "javac" results

Marker creation requires that a console be allocated and "listfiles" attribute be "true" in the "javac" declarations.


Ant color options:

- Ant error message in console
- Ant warning message in console
- Ant information message in console
- Ant verbose message in console
- Ant debug message in console


Color:

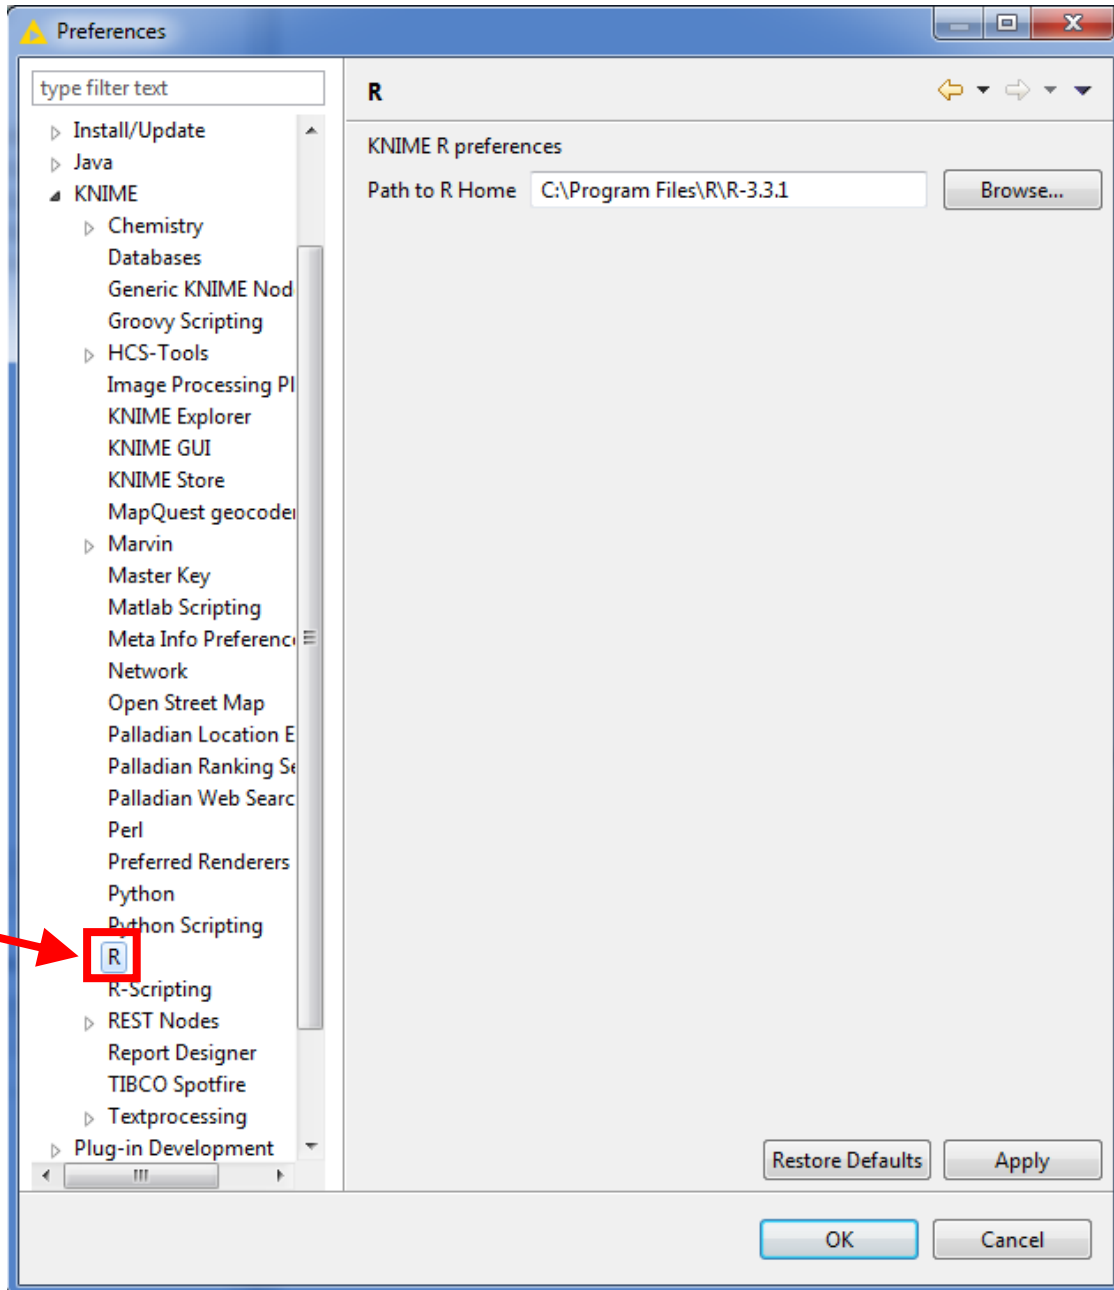

Click here

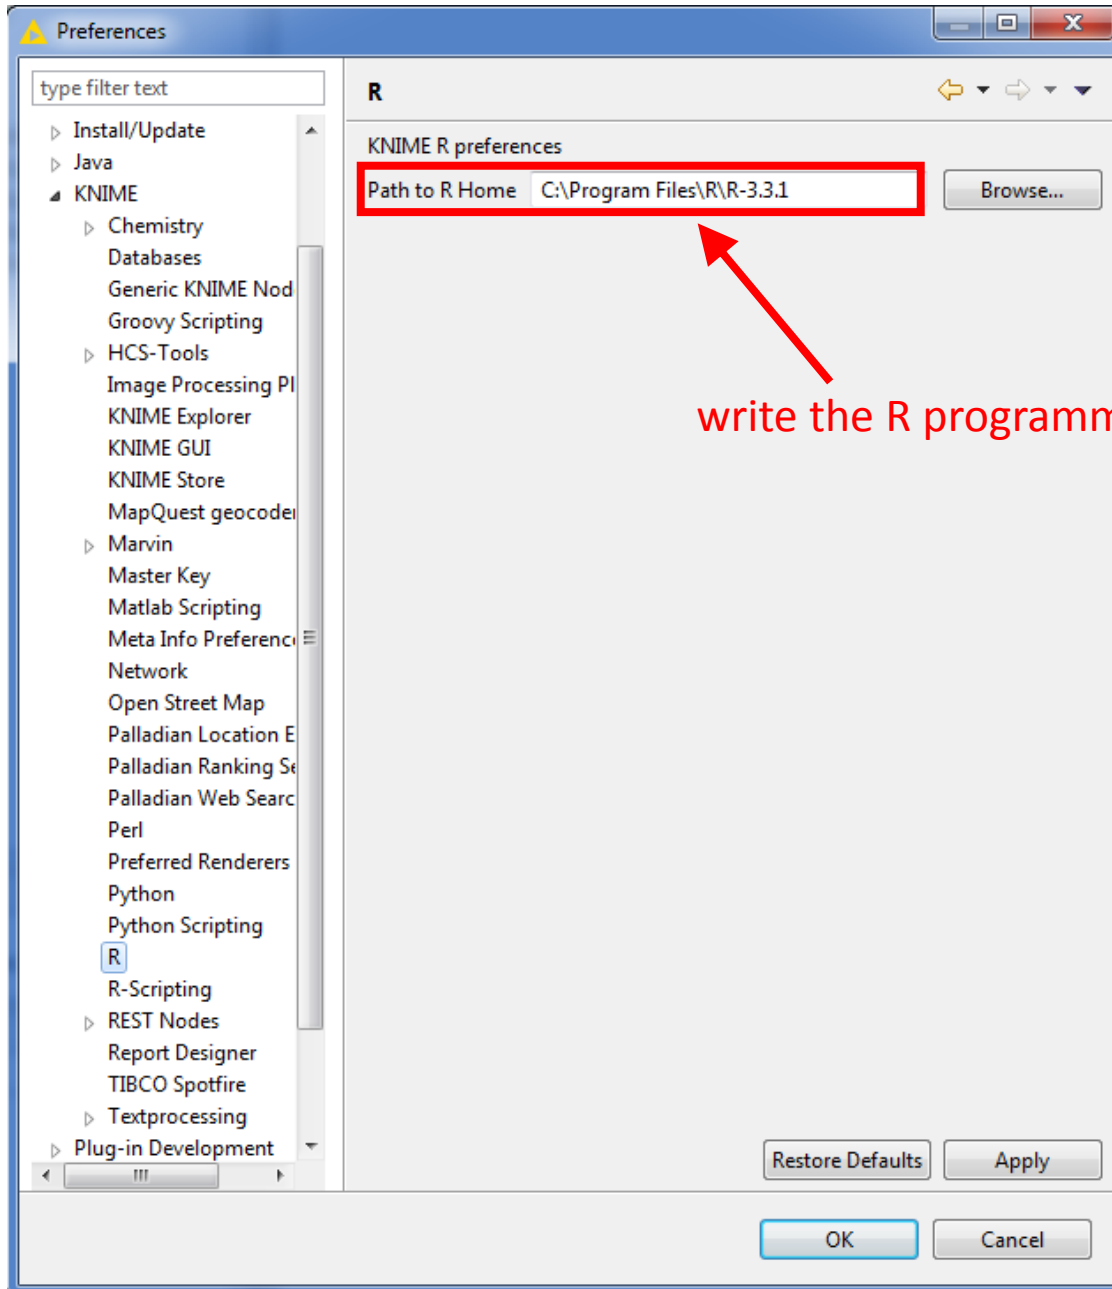

write the R programming language path

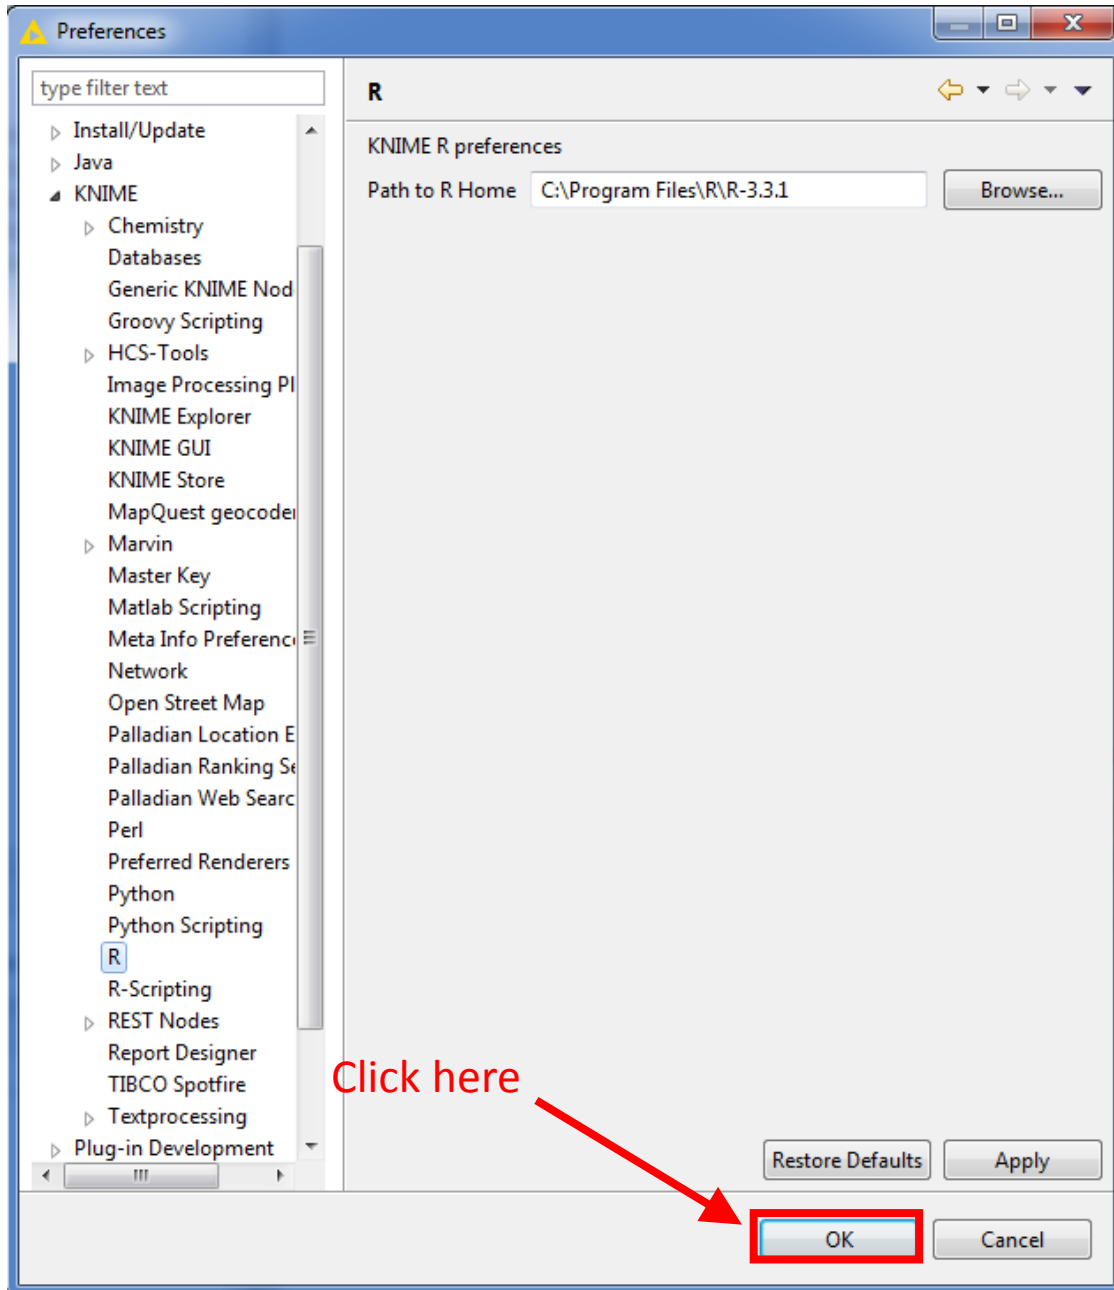

Click here



Preferences

type filter text

- Install/Update
- Java
- KNIME
  - Chemistry
  - Databases
  - Generic KNIME Node
  - Groovy Scripting
  - HCS-Tools
  - Image Processing Plugins
  - KNIME Explorer
  - KNIME GUI
  - KNIME Store
  - MapQuest geocoding
  - Marvin
  - Master Key
  - Matlab Scripting
  - Meta Info Preferences
  - Network
  - Open Street Map
  - Palladian Location Explorer
  - Palladian Ranking Service
  - Palladian Web Search
  - Perl
  - Preferred Renderers
  - Python
  - Python Scripting
  - R**
    - R-Scripting**
    - REST Nodes
    - Report Designer
    - TIBCO Spotfire
  - Textprocessing
  - Plug-in Development

R

KNIME R preferences

Path to R Home C:\Program Files\R\R-3.3.1 Browse...

Restore Defaults Apply

OK Cancel

